
Short Form Specification

**DT-M150X01 CAD-T
RGB/DVI**



December 2013

Preliminary

1. General Features


Item	Description	Unit
Diagonal	38.1 (15.0")	cm
Active area	304.1 (H) x 228.1 (V)	mm
Resolution – display	1024 (RGB) x 768	pixel
Resolution – controller	640 x 480 – 1024 x 768	pixel
Pixel pitch	0.297 X 0.297	mm
Pixel arrangement	R.G.B. Vertical Stripe	
Display colors	16,2 M	colors
Display mode	Normally White	
Brightness	328	cd/m ²
Contrast ratio	700:1	
Viewing angle	hor.: 80° / 80°, ver.: 70° / 70°	deg.
Response time	25	msec
LED Backlight life	min 50,000	hrs
Interface	Analog-RGB H-Sync. / V-Sync. // DVI	
Touch	5W Resistive / USB	
Power input voltage	12	V DC
Power consumption	15	W
Dimension	349.15 x 276.10 x 36.00	mm
Weight	2,900	gram
VPE	5	
Remark	Resistive-Touch / LED	

Power Input Connector

Type: DC Jack

Pin No.	Symbol	Description	Note
1	Vin	12V DC	Center
2	GND	GND	

Figure 1: Mechanical Outlines

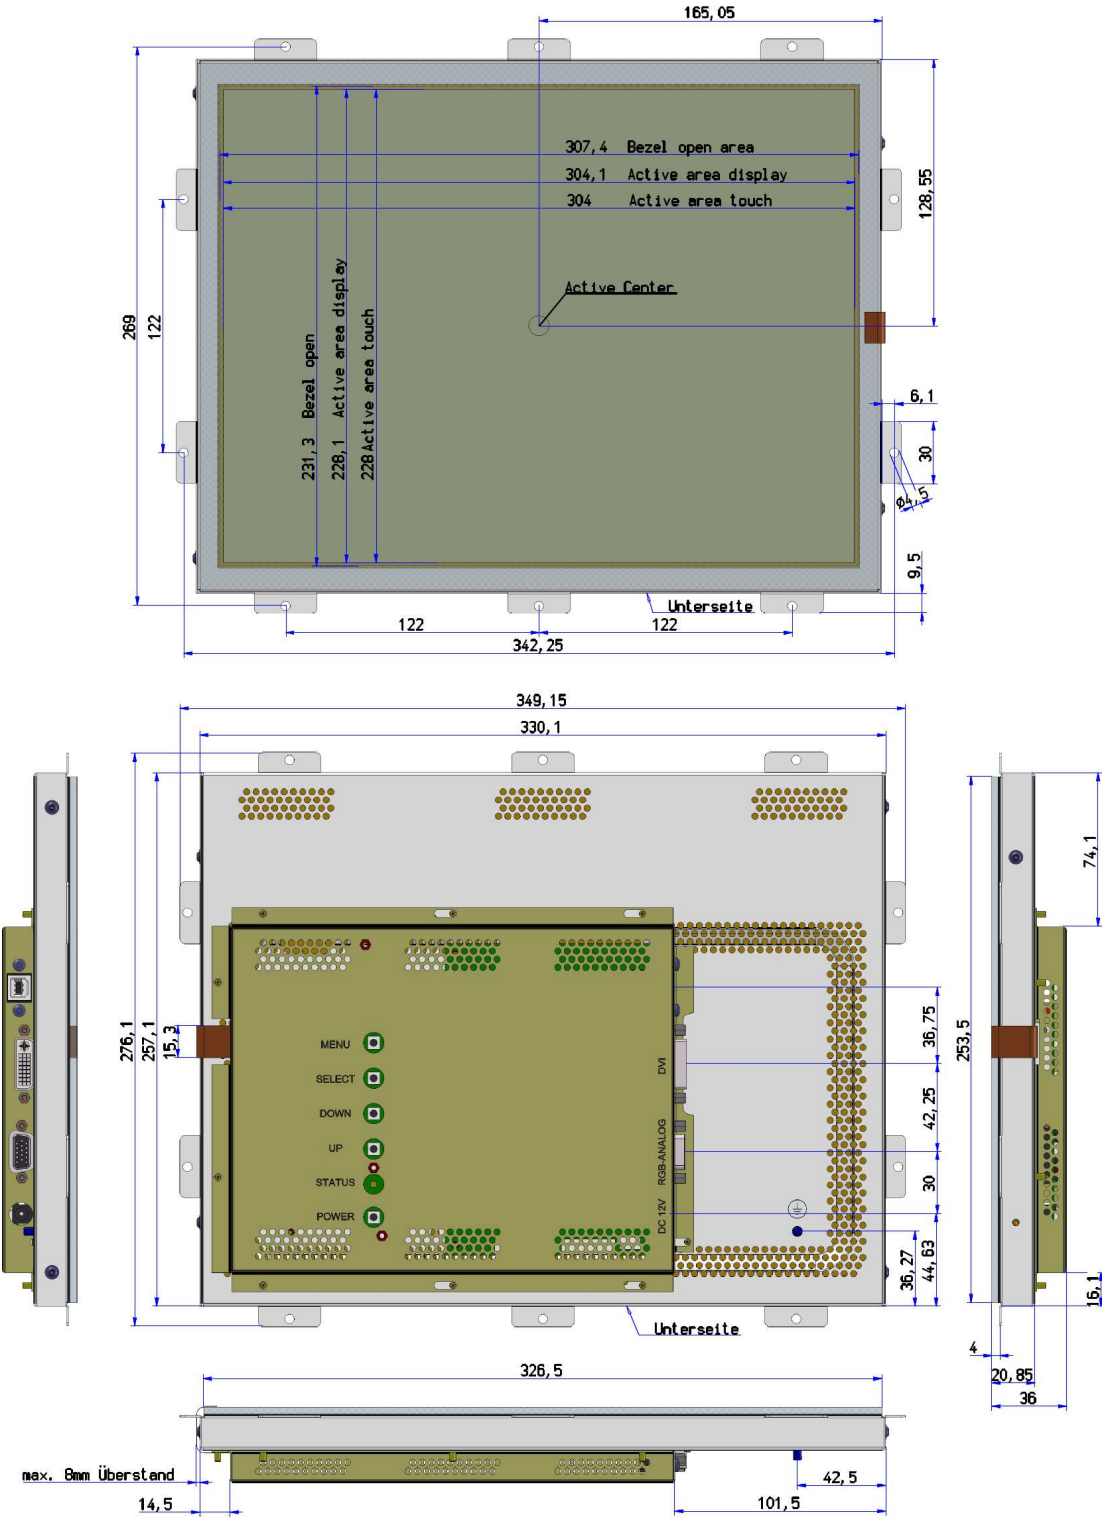

2. Handling & Cautions

Cautions when taking out the module

- Pick the pouch only, when taking out module from a shipping package.

Cautions for handling the module

- As the electrostatic discharges may break the LCD module, handle the LCD module with care. Peel a protection sheet off from the LCD panel surface as slowly as possible.
- As the LCD panel and backlight element are made from fragile glass material, impulse and pressure to the LCD module should be avoided.
- As the surface of the polarizer is very soft and easily scratched, use a soft dry-cloth without chemicals for cleaning.
- Put the module display side down on a flat horizontal plane.
- Handle connectors and cables with care.

Cautions for the atmosphere

- Dewdrop atmosphere should be avoided.
- Do not store and/or operate the LCD module in a high temperature and/or humidity atmosphere. Storage in an electro-conductive polymer-packing pouch and under relatively low temperature atmosphere is recommended.

Cautions for the module characteristics

- Do not apply fixed pattern data signal to the LCD module at aging time.
- Applying fixed pattern for a long time may cause image sticking.

Other cautions

- Do not disassemble and/or re-assemble LCD module.
- Do not re-adjust variable resistor or switch etc.
- When returning the module for repair or etc., please pack the module not to be broken. We recommend on using the original shipping packages.

3. Packing Information

Each of the five modules is packed into an anti-static foil.

These five units are packed into a carton filled and cushioned with shock absorbing carton and therefore good protected for shipping on euro pallet.
